


H  
H44W-150Lb  
I

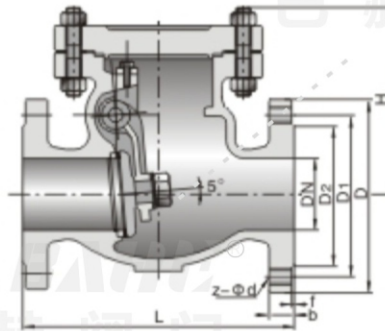

**标准**

设计与制造按BS1868,ANSI B16.34  
结构长度按ANSI B16.10  
法兰连接尺寸按 ANSI B16.5  
压力温度额定值按 ANSI B16.34  
检验按 API 598

**Standards**

Design and manufacturing press: BS1868, ANSI B16.34  
Structure length according to: ANSI B16.10  
Flange connection size according to: ANSI B16.5  
Pressure and temperature rating according to: ANSI B16.34  
Inspection press: API 598

**主要零件材料** Material of main parts

零件名称 Part Name	材料 material										
阀体 Body	阀盖 Bonnet	A216 WCB	A352LCB	A217 WC6	A217 WC9	A217 C5	A351 CF8	A351 CF8M	A351 CF3	A351 CF3M	
阀瓣 Disc	摇杆 Arm										
支架 Yoke											
销轴 Arm Pin	A182 F6	A182 F304					A182 F316	A182 F304L	A182 F316L		
螺柱 Stud	A193-B7 A320-L7 A193-B8										
螺母 Nut	A194-2H A194-7 A194-8										

**主要连接尺寸** Main connection size

型号 Type	规格 Size (mm)		尺寸 Dimension (mm)						
	inch	DN	L	D	D1	D2	b	z-ød	H
H H44W-150Lb I	1	25	127	108	79.5	51	12	4-ø15	90
	1½"	40	165	127	98.5	73	15	4-ø15	115
	2"	50	203	152	120.7	92	16	4-ø19	150
	2½"	65	216	177.8	139.7	104.7	18	4-ø19	160
	3"	80	241	190.5	152.4	127	19	4-ø19	180
	4"	100	292	229	190.5	157	24	8-ø19	220
	5"	125	330	254	216	185.7	26	8-ø22	280
	6"	150	356	279	241.3	216	26	8-ø22	340
	8"	200	495	343	298.5	270	29	8-ø22	400
	10"	250	622	406	362	324	31	12-ø25	460
	12"	300	698	483	432	381	32	12-ø25	530
	14"	350	787	533	476.3	413	35	12-ø29	580
	16"	400	864	597	540	470	37	16-ø29	600
	18"	450	978	635	578	533.4	40	16-ø32	650
	20"	500	978	698.5	635	584	43	20-ø32	700
	24"	600	1295	813	749.3	692	48	20-ø35	780
28"	700	1448	927	863.6	800	72	28-ø35	850	
30"	800	1524	984	914.4	857	75	28-ø35	920	

H 300  
H44W-600Lb  
I 900

主要连接尺寸 Main connection size

型号 Type	规格 Size (mm)		尺寸 Dimension (mm)						
	inch	DN	L	D	D1	D2	b	z-ød	H
H H44W-300Lb I	2"	50	267	165	127	92	23	8-ø19	170
	2½"	65	292	190.5	149.4	104.7	26	8-ø22	180
	3"	80	318	210	168.2	127	29	8-ø22	210
	4"	100	356	254	200.2	157	32	8-ø22	290
	5"	125	400	279	235	185.7	35	8-ø22	290
	6"	150	444	318	270	216	37	12-ø22	350
	8"	200	533	381	330	270	42	12-ø25	430
	10"	250	622	445	387.5	324	48	16-ø29	480
	12"	300	711	521	451	381	51	16-ø32	550
	14"	350	838	584	514.5	413	54	20-ø32	620
	16"	400	864	648	571.5	470	58	20-ø35	650
	18"	450	978	711	628.7	533.4	61	24-ø35	690
	20"	500	1016	775	685.8	584	64	24-ø35	740
	24"	600	1346	914.4	812.8	692	70	24-ø41	800
28"	700	1499	1035	939.8	800	86	28-ø48	860	
30"	800	1594	1092	997	857	92	28-ø48	980	
H H44W-600Lb I	2"	50	292	165	127	92	32.4	8-ø19	210
	2½"	65	330	190	149	100	35.4	8-ø22	230
	3"	80	356	210	168	127	38.4	8-ø22	255
	4"	100	432	273	216	157	44.4	8-ø25	295
	6"	150	559	356	292	216	54.4	12-ø29	365
	8"	200	660	419	349	270	62.4	12-ø32	420
	10"	250	787	508	432	324	70.4	16-ø35	505
	12"	300	838	559	489	381	73.4	20-ø35	545
	14"	350	889	603	527	413	76.4	20-ø38	600
	16"	400	991	686	603	470	83.4	20-ø41	650
H H44W-900Lb I	2"	50	371.2	216	165.1	95.2	46	8-ø25	300
	2½"	65	384.2	244	190.5	108	49	8-ø25	335
	3"	80	422.2	241	190.5	123.8	46	8-ø25	340
	4"	100	460.2	292	234.9	149.2	52	8-ø32	370
	6"	150	613.2	381	317.5	211.1	59	12-ø32	425
	8"	200	740.2	470	393.7	269.8	64	12-ø38	490
	10"	250	841.2	545	469.9	323.8	72	16-ø38	585
	12"	300	968.2	610	533.4	381	78	20-ø38	655
	14"	350	1038.5	640	559	419.1	87	20-ø41	710
16"	400	1139.5	705	616	469.9	90	20-ø45	760	